



UNOFLEX

MOVABLE WALL SYSTEMS
FUNCTIONAL DESIGN FOR EVERY SPACE

ACOUSTIC
GLAZING
FOLDING
SLIDING





UNOFLEX

The UNOFLEX Series of Movable wall system is functional and durable in design and a space saving solution.

From small offices to large exhibition centers, our functional UNOFLEX movable walls can offer every space a new dimension. With flexible design and function, our UNOFLEX movable walls will turn big space into multi functional rooms in no time. By using completely maintenance free ball bearing trolley and high grade aluminum and steel track system, UNOFLEX Movable walls are your best choice for any rooms.

With the spindle mechanism operating top and bottom seals, sliding panels turn into solid sound insulating wall, which will divide one large hall into multiple rooms of any function.

In addition to our standard models UNO80 and UNO100, we offer many tailored design for every project, be it sliding, folding or swing doors. If there is a need to divide a room without any loss of sound insulation, UNOFLEX product is what you need.

With technical and design know-how from PANELÉS FRANCE SARL, UNOFLEX achieved the quality certification of ISO9001:2000. UNOFLEX product creates multi functional space with quality and design.

FUNCTIONAL DESIGN FOR EVERY SPACE



UNO 100

The UNO100 movable wall system can create silence with a panel thickness of only 105mm. It is extremely easy to operate and completely user-friendly. There are no limits on parking layouts and countless design surfaces to choose from.

As with the name, UNO100 can provide sound insulation up to 56DBS. The height of walls can be up to 15 meters. The standard panel width is 1220mm, but the wide panels of more than 2000mm are often produced on special request without any problem. Glass viewer can also be done on UNO100G movable wall panels. Single or double pass doors can be integrated into UNO100 walls. If required, semi automatic and fire resistant panels can be produced as custom solutions.

We have different tracks and roller types to accommodate panels depending on the weight and height of the panels.





UNO 100

PRODUCT DETAIL


Type	UNO 100
Panel Thickness	105 mm
Panel Height	1800 mm-15000 mm
Panel Width	600 mm-2400 mm
Frame Construction	Aluminum/Steel
Surface Board	16-18 mm
Vertical Profiles	Anodized Aluminum w/ magnetic strips
Horizontal Profiles	Black Aluminum/ EPDM
Doors	Single or Double
Acoustic Ratings	37-56 DBS
Fire Safety	Optional

UNO 100G

PRODUCT DETAIL

Type	UNO 100G
Panel Thickness	105 mm
Panel Height	1800 mm-15000 mm
Panel Width	600 mm-2400 mm
Frame Construction	Aluminum/Steel
Surface Board	16-18 mm w/6 mm glass
Vertical Profiles	Anodized Aluminum w/ magnetic strips
Horizontal Profiles	Black Aluminum/ EPDM
Doors	Not Available
Acoustic Ratings	37-50 DBS
Fire Safety	Optional



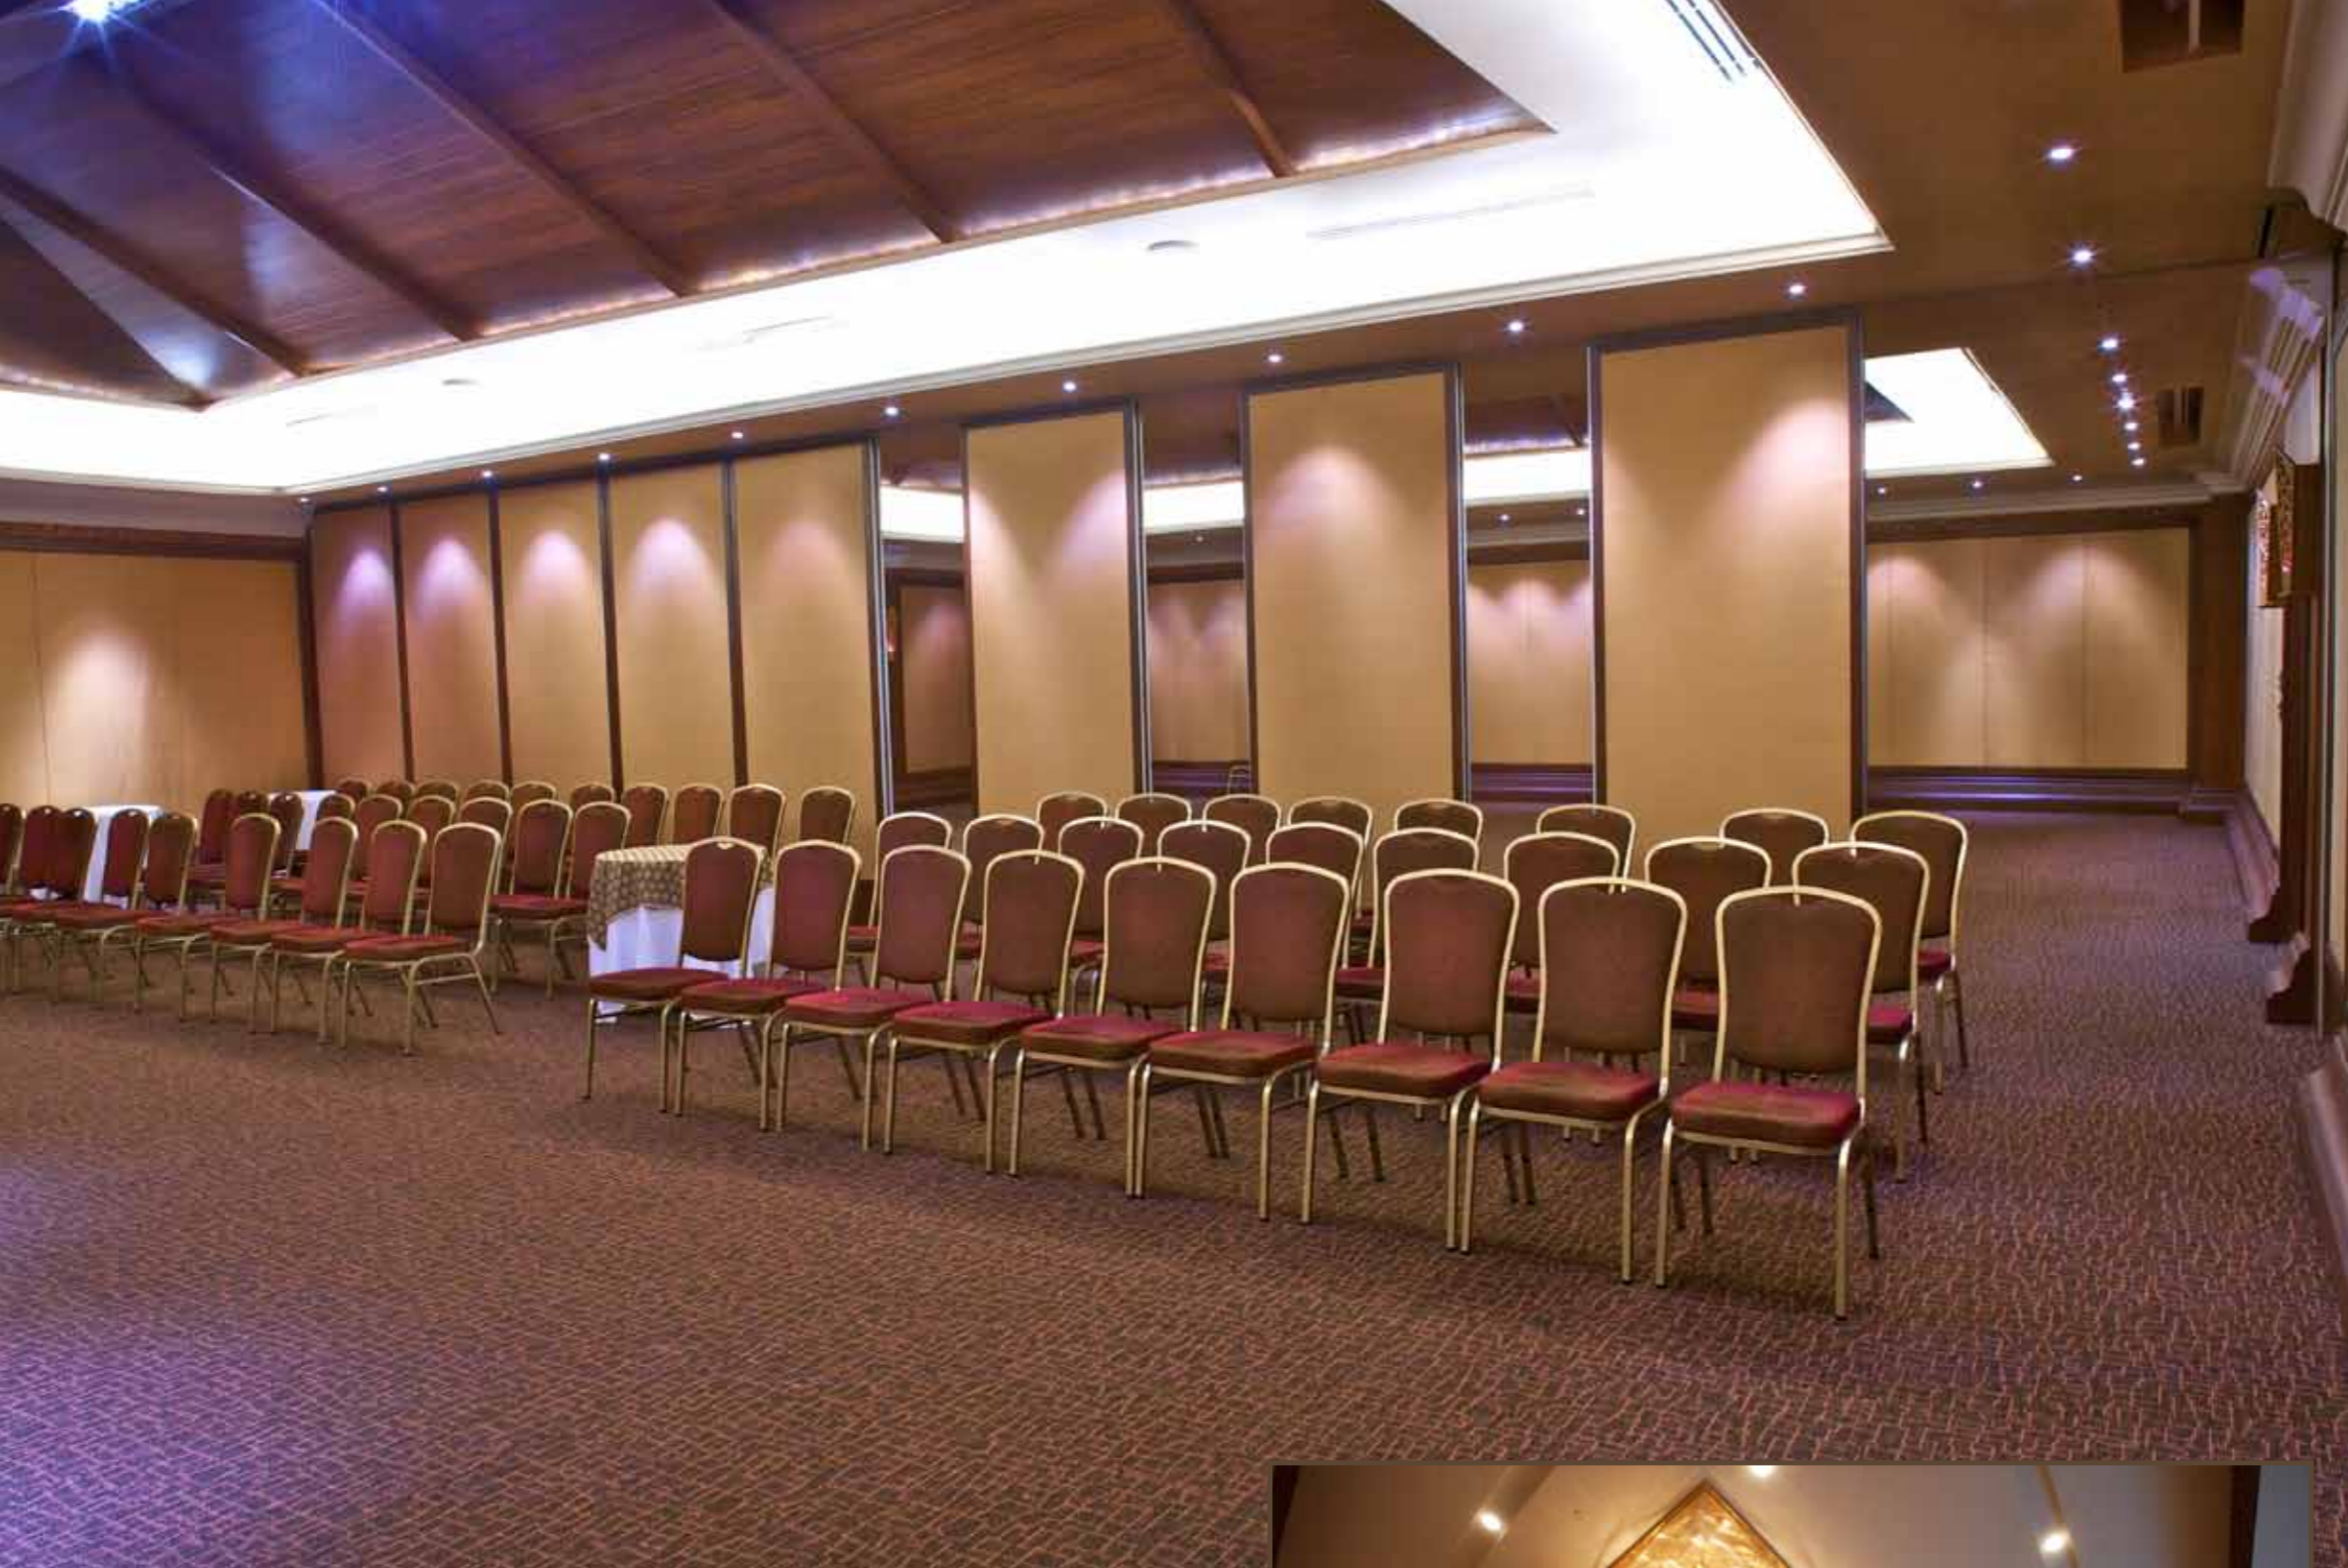

UNO 80

UNO80 movable wall systems are for those who want a flexible space design without wasting large space for storage. With the favorable cost aspect, UNO80 is an optimal alternative to all users.

Even with its slim design, UNO80 does not compromise on sound insulation and is a perfect solution for office meeting rooms, schools and restaurants. Sound insulations up to 44DBS and maximum panel height up to 4.5 meters, UNO80 accommodates the market demand for a slim and function panel wall while meeting sound insulation requirement. With its modular panel design and light frame construction, UNO80 can provide flexibility in room design without a requirement for a high budget.

Silent track and roller system and aluminum edge protection on panels keep UNO80 movable walls user-friendly and long lasting.





UNO 80

PRODUCT DETAIL

Type	UNO 80
Panel Thickness	80 mm
Panel Height	1800 mm-4500 mm
Panel Width	600 mm-2400 mm
Frame Construction	Aluminum/Steel
Surface Board	10 mm
Vertical Profiles	Anodized Aluminum in tongue and groove design
Horizontal Profiles	Black Aluminum/ EPDM
Doors	Single
Acoustic Ratings	36-44 DBS
Fire Safety	Optional

UNO 80G

PRODUCT DETAIL

Type	UNO 80G
Panel Thickness	80 mm
Panel Height	1800 mm-4500 mm
Panel Width	600 mm-1220 mm
Frame Construction	Aluminum/Steel
Surface Board	10 mm w/6 mm glass
Vertical Profiles	Anodized Aluminum in tongue and groove design
Horizontal Profiles	Black Aluminum/ EPDM
Doors	Not Available
Acoustic Ratings	36-44 DBS





GLAZING

Our GLAZING series of glass walls give transparency with complete privacy. This glass movable wall system is a perfect solution for dividing offices and meeting rooms.

Many banks use GLAZING wall system to divide main banking hall from ATM area. It is also an elegant solution for shop front façade. GLAZING panels can be produced with or without vertical frames.

PRODUCT DETAIL

Type	Glazing 10/12
Panel Thickness	Fitting Profile <45mm
Panel Height	1800 mm-3500 mm
Panel Width	600mm-1100mm
Frame Construction	Steel/Stainless steel
Surface Board	Tempered/laminated glass in 10/12mm
Vertical Profiles	Glass/Aluminum
Horizontal Profiles	Aluminum/Stainless Steel
Doors	Fixed Doors Only





SPECIAL PROJECTS

UNOFLEX special product division can produce per your special needs such as air-tight sliding, swing doors and X-ray doors for hospitals and sound insulating doors for schools, music studios, radio and TV stations.

For places where there are needs for keeping in the sound inside, UNOFLEX special sound insulating doors can meet the requirement. Extremely wide sliding and single action doors can also be produced for hotels, offices and private residences.

PRODUCT DETAIL

Type	Special
Panel Thickness	40-110mm
Panel Height	1800mm-4000mm
Panel Width	600mm-5000mm (total width)
Frame Construction	Aluminum/Steel
Surface Board	Per Spec.
Vertical Profiles	Per Spec.
Horizontal Profiles	Per Spec.
Doors	Per Spec.
Acoustic Ratings	Per Spec.
Fire Safety	Optional





UNOFLEX



INDIA VIETNAM CAMBODIA LAOS MYANMAR HONGKONG MALAYSIA SINGAPORE INDONESIA PHILIPPINES